



Isilon NL410

# ISILON NL-SERIES

The challenge of cost-effectively storing and managing unstructured data is an ever-growing concern. You have to weigh the cost of storing certain aging data sets against the need for quick access. Meeting this challenge requires a solution that bridges the gap between high-performance (but costly) primary storage and inexpensive (but management-intensive) offline storage solutions.

Dell EMC Isilon NL-Series scale-out NAS storage solutions redefine the economics of nearline storage by combining near-primary accessibility, near-tape value, and ease of use.


**Scalability:** The Isilon NL-Series is built for highly flexible and efficient large-capacity storage. Each Isilon NL node houses 35 SATA hard disk drives with a choice of drive capacities (1 TB, 2 TB, 3 TB, 4 TB, 6 TB, or 8 TB) in a 4U chassis, allowing you to seamlessly scale up to 40.3 petabytes (PB) in a single file system.<sup>1</sup>

**Efficiency:** With Isilon, you can achieve highly efficient utilization rates—up to 80 percent versus 50 percent for traditional NAS storage—and further reduce capacity requirements with the Isilon SmartDedupe™ data deduplication option. This translates into greater overall efficiency, resulting in lower acquisition, operating, and maintenance costs.

**Simplicity:** You can configure and bring an Isilon NL-Series cluster online in as little as 10 minutes. With a single pool of storage with a global namespace, the NL-Series eliminates the need for multiple volumes, thereby greatly simplifying the management of your Big Data environment.

**Security:** With optional FIPS 140-2 level 2 self-encrypting drives, the NL-Series platform allows you to meet regulatory and compliance needs for securing data at rest. The Isilon NL-Series with SED nodes provides the security you need without sacrificing performance or usability.

## ARCHITECTURE

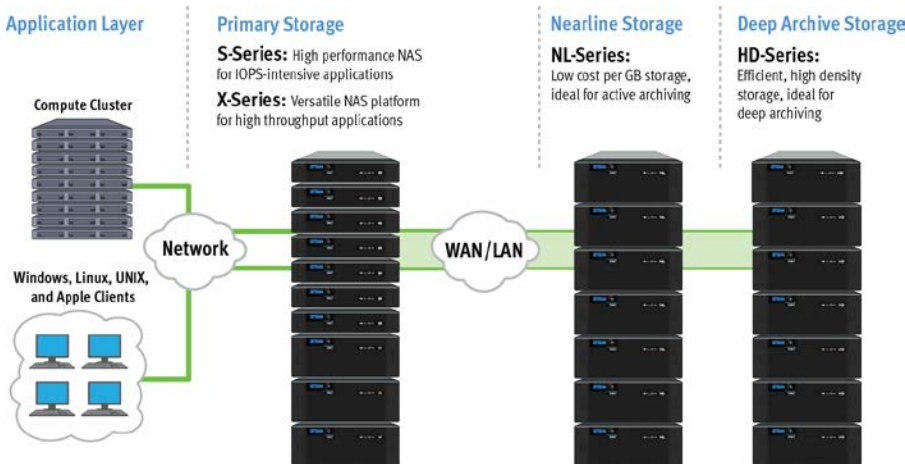

<sup>1</sup> Usable capacity will be lower than the raw capacity reflected in this specification sheet.

## ISILON NL-SERIES NODE SPECIFICATIONS

ISILON NL410 NODE ATTRIBUTES & OPTIONS	1 TB HDD	2 TB HDD	3 TB HDD	4 TB HDD	6 TB HDD	8 TB HDD
CAPACITY <sup>1</sup>	35 TB	70 TB	105 TB	140 TB	210 TB	280 TB
HARD DRIVES (3.5" 7200 RPM)	35	35	35	35	35	35
SELF-ENCRYPTING DRIVE (SED) OPTION (7200 RPM)	No	No	Yes	Yes	Yes	Yes
SOLID-STATE DRIVE (SSD)	1 x 200 GB	1 x 400 GB	1 x 800 GB	1 x 800 GB	1 x 800 GB	1 x 1.6 TB
SELF-ENCRYPTING DRIVE (SED SSD) OPTION	No	No	Yes	Yes	Yes	Yes
ISILON ONEFS OPERATING SYSTEM VERSION REQUIRED	7.2.1 or higher	7.2.1 or higher	7.2.1 or higher	7.2.1 or higher	7.2.1 or higher (without SED) 8.0 or higher (with SED)	8.0 or higher
SYSTEM ECC MEMORY	24 GB or 48 GB					
FRONT-END NETWORKING	2 x 1 Gigabit Ethernet and 2 x 10GbE (SFP+ or twin-ax copper)					
NETWORK INTERFACES	Isilon network interfaces support IEEE 802.3 standards for 10Gbps, 1Gbps, and 100Mbps network connectivity					
DRIVE CONTROLLER	SATA-3, 6 Gb/s					
CPU TYPE	Single Intel® Xeon® Processor E5-2407 @ 2.4 GHz, 4 Core					
INFRASTRUCTURE NETWORKING	2 InfiniBand connections supporting DDR and QDR links					
NON-VOLATILE RAM (NVRAM)	2 GB					
TYPICAL POWER CONSUMPTION @ 100V	800 Watts					
TYPICAL POWER CONSUMPTION @ 240V	720 Watts					
TYPICAL THERMAL RATING	2,500 BTU/hr					

CLUSTER ATTRIBUTES	NL410
NUMBER OF NODES	3 to 144
CAPACITY <sup>1</sup>	105 TB to 40.3 PB
MEMORY	72 GB to 6.9 TB

RACK UNITS

12 to 576

## PRODUCT ATTRIBUTES

SCALE-OUT ARCHITECTURE	Truly distributed, fully symmetric clustered architecture that combines modular storage nodes with Isilon intelligent software
MODULAR DESIGN	Self-contained nodes include server, software, and disks in a 4U rack-mountable node
OPERATING SYSTEM	Isilon OneFS® distributed file system: creates a cluster with a single file system and single global namespace; fully journaled, fully distributed, globally coherent write/read cache
HIGH AVAILABILITY	No single point of failure; self-healing design protects against disk or node failure; includes back-end intra-cluster failover
SCALABILITY	Scales from 3 to 144 nodes in a single cluster with over 40 PB capacity; add a node to scale performance and capacity in 60 seconds
DATA PROTECTION	FlexProtect™ file-level striping with support for N+1 through N+4 and mirroring data protection schemes
DATA REPLICATION	SyncIQ® fast and flexible file-based asynchronous replication
DATA RETENTION	SmartLock® policy-based retention and protection against accidental deletion
DATA ENCRYPTION OPTION	FIPS 140-2 level 2 validated self-encrypting drives (SEDs) with unique AES-256 bit strength keys assigned to each drive
SECURITY	File system audit capability to improve security and control of your storage infrastructure and address regulatory compliance requirements
EFFICIENCY	SmartDedupe data deduplication option, which can reduce storage requirements by up to 35 percent
PROTOCOL SUPPORT	NFSv3, NFSv4, NFS Kerberized sessions (UDP or TCP), SMB1 (CIFS), SMB2, SMB3 Multichannel, HTTP, FTP, NDMP, SNMP, LDAP, HDFS, ADS, NIS reads/writes

## ENVIRONMENTAL SPECIFICATIONS

POWER SUPPLY	Dual redundant, hot-swappable 1050W power supplies with power factor correction (PFC)
OPERATING ENVIRONMENT	50° F to 95° F (10° C to 35° C), 5% to 95% relative humidity, non-condensing
DIMENSIONS/WEIGHT	NL410: Height: 6.96" (17.7 cm), width: 18.9" (48 cm), depth: 31.25" (79.4 cm), weight: 114 lbs (51.7 kg)
MINIMUM SERVICE CLEARANCES	Front: 35" (88.9 cm), rear: 14" (35.6 cm)

<sup>1</sup> Usable capacity will be lower than the raw capacity reflected in this specification sheet.

## SAFETY AND EMI COMPLIANCE

### Statement of Compliance

This Information Technology Equipment is compliant with the electromagnetic compatibility (EMC) and product safety regulations/standards required by the countries in which the product is sold. EMC compliance is based on FCC part 15, CISPR22/CISPR24 and EN55022/EN55024 standards, including applicable international variations. EMC compliant Class A products are marketed for use in business, industrial, and commercial environments. Product Safety compliance is based on IEC 60950-1 and EN 60951-1 standards, including applicable national deviations.

This Information Technology Equipment is in compliance with EU RoHS Directive 2011/65/EU.

The individual devices used in this product are approved under a unique regulatory model identifier that is affixed to each individual device rating label, which may differ from any marketing or product family name in this datasheet.

For additional information see <https://support.emc.com> under the Safety & EMI Compliance Information tab.

### TAKE THE NEXT STEP

Contact your Dell EMC sales representative or authorized reseller to learn more about how the Isilon NL-Series can benefit your organization.

[Shop Dell EMC Isilon](#) to compare features and get more information.



[Learn more](#) about Dell EMC Isilon solutions



[Contact](#) a Dell EMC Expert



[View more](#) resources



Join the conversation with [#DellEMCStorage](#)